



## Chlorosulfonated Polyethylene (CSM)

### Einhausen



### JUNG Gummitechnik GmbH

#### Plant I

Robert-Bosch-Str. 2-6

#### Plant II

Robert-Bosch-Str. 12  
64683 Einhausen – Germany

Phone: +49 (0) 6251 | 9634-0  
Fax: +49 (0) 6251 | 549-38

### Warstein



#### Plant III

Friedrich-Harkort-Str. 12  
59581 Warstein – Germany



Phone: +49 (0) 2902 | 97916-0  
Fax: +49 (0) 2902 | 97916-19



[www.jung-gt.de](http://www.jung-gt.de)  
[info@jung-gt.de](mailto:info@jung-gt.de)

For further information regarding designs, chemical resistances,  
areas of application, etc., please contact our service hotline.

**+49 (0) 62 51 196 34-0**

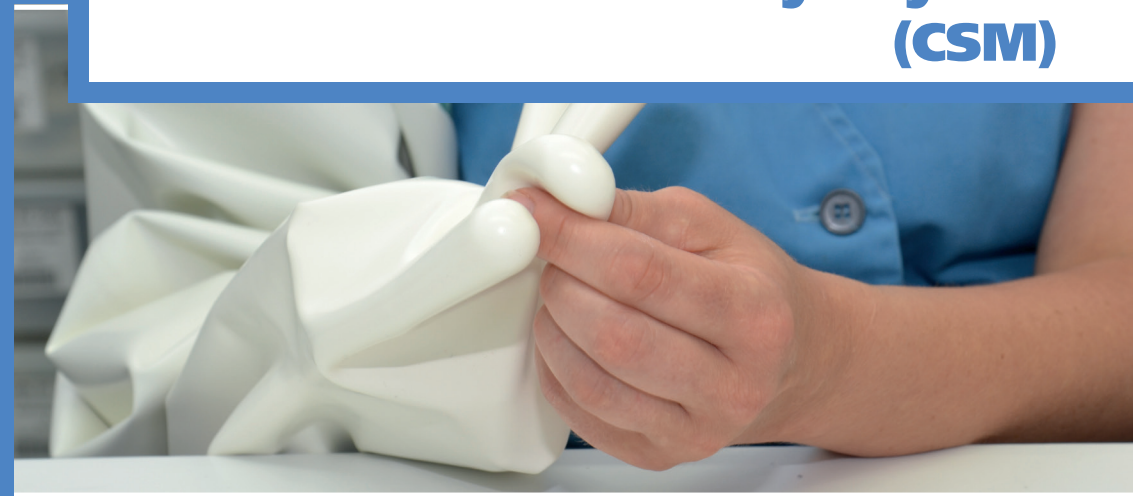

# INTRODUCTION

## A glove made of **Chlorosulfonated Polyethylene (CSM)**

The **Jugitec® H** glove convinces with its exceptional resistance against oxygen, ozone based aging, UV rays, heat and chemical products. It is recommended when working with oxidizing products, concentrated nitric acid, concentrated hydrochloric acid, ammonia, concentrated alkalis and alcohols.

<b>Model:</b>	smooth
<b>Sizes:</b>	L (9-10)/XL (11)
<b>Length:</b>	800 mm/920 mm
<b>Hand types:</b>	ambidextrous
<b>Thickness:</b>	0,4/0,6 mm

### **PROTECTION AGAINST MICROORGANISMS** according to DIN EN ISO 374-5: 2016

Glove to protect against bacteria, fungi and viruses. The resistance against penetration was tested under laboratory conditions and only refers to the tested samples.

ISO 374-1 / Type B



A K L P

ISO 374-5: 2016



VIRUS

DIN EN 388



1 1 1 1 X

# PROPERTIES

### **MATERIAL PROPERTIES**

- temperature range: from -20°C to +120°C
- ozone and weather resistant
- very good resistance against many oxidizing chemicals
- highly impermeable to gas

### **CHEMICAL RESISTANCE** in accordance with EN ISO 374-1: 2016 + A1: 2018

Testing chemicals	CAS-No.	Index
A Methanol	67-56-1	4 (> 120 min)
K Sodium hydroxide 40%	1310-73-2	6 (> 480 min)
L Sulfuric acid 96%	7664-93-9	6 (> 480 min)
P Hydrogen peroxide 30%	7722-84-1	6 (> 480 min)

### **MECHANICAL PROPERTIES** in accordance with EN 388:2016

Abrasion resistance	Degree of protection 1
Cut resistance	Degree of protection 1
Tear resistance	Degree of protection 1
Puncture resistance	Degree of protection 1
ISO Cut resistance	Degree of protection X